

FINGERTIP Pulse Oximeter



JZ-130R



Description:


- 1) Two-color 0.96-inch OLED display, 5 levels of brightness adjustable
- 2) The interface can have four different display modes
- 3) Battery low battery indication
- 4) Have blood oxygen, pulse, bar graph, pulse waveform display, and PI perfusion monitoring
- 5) **With unique RR breathing frequency function**
- 6) Operation menu for function setting
- 7) When there is no signal, the product will automatically shut down after 8S, saving power
- 8) Small size, light weight, easy to carry out

Power Requirement: 2 x AAA 1.5V alkaline battery



The product has passed the medical certification of the United States and Europe

4 parameters: SPO2, PR, PI, RR

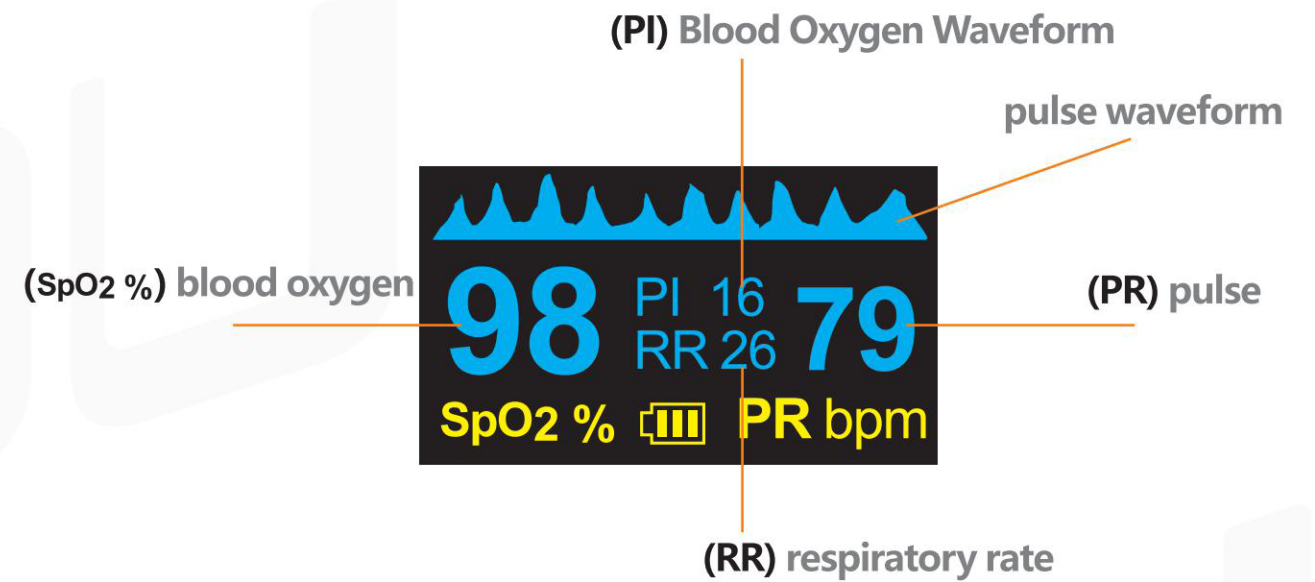

The interface can have four angles and six different display modes



Technical Parameter

Display type	HD dual-color OLED display
Blood oxygen saturation	measurement range: 70% to 99%
Measurement accuracy	80% to 99% in the range of $\pm 2\%$, 70% to 79% within $\pm 3\%$, no 70% or less required
Resolution	blood oxygen saturation $\pm 1\%$
Pulse rate	Measuring range: 30BPM~240BPM
Measurement accuracy	$\pm 1\text{BPM}$ or $\pm 1\%$ of measured value

Packing Size

N.W.	41g (without battery)
G.W.	68g
Product size	62*32*33mm
Box size	81*68*39mm
QTY /G.W.	100pcs/7.7KG
CTN Size	430*370*210mm;
CBM	0.03m ³

Product List



Host



Manual



Lanyard