

# FINGERTIP Pulse Oximeter



JZ-131R




## Description:

- 1) Two-color 0.96 inch OLED display with 5 levels of brightness adjustable
- 2) The interface can have six different display modes
- 3) Low battery indicator
- 4) With blood oxygen, pulse, bar graph, pulse waveform display, PI perfusion monitoring
- 5) It has the function of sleep monitoring and recording as a waveform. Up to 8 hours of waveform data can be recorded!
- 6) Operation menu for function setting
- 7) When there is no signal, the product will automatically shut down after 8S to save power
- 8) Small size, light weight, easy to execute"



The product has passed the medical certification of the United States and Europe

4 parameters: SPO2, PR, PI, ODI (oxygen saturation index is 4%)

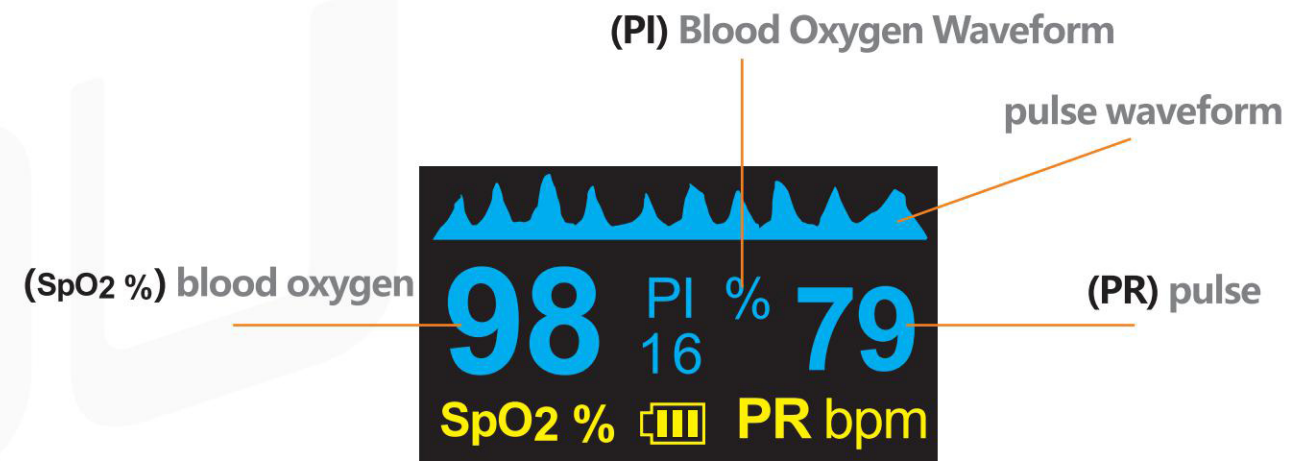

The interface can have four angles and six different display modes



## Technical Parameter

|                         |  |
|-------------------------|--|
| Display type            | HD dual-color OLED display   |
| Blood oxygen saturation | measurement range: 70% to 99%  |
| Measurement accuracy    | 80% to 99% in the range of $\pm 2\%$ ,<br>70% to 79% within $\pm 3\%$ , no 70%<br>or less required |
| Resolution              | blood oxygen saturation $\pm 1\%$  |
| Pulse rate              | Measuring range: 30BPM~240BPM  |
| Measurement accuracy    | $\pm 1\text{BPM}$ or $\pm 1\%$ of measured value   |

## Packing Size

|              |                       |
|--------------|-----------------------|
| N.W.         | 41g (without battery) |
| G.W.         | 68g                   |
| Product size | 62*32*33mm            |
| Box size     | 81*68*39mm            |
| QTY /G.W.    | 100pcs/7.7KG          |
| CTN Size     | 430*370*210mm;        |
| CBM          | 0.03m3                |

## Product List

